





INLINE® DVI-I KABEL, DIGITAL/ANALOG, 24+5 STECKER / STECKER, DUAL LINK



DVI-I digital/analog 24+5 Stecker auf DVI-I digital/analog 24+5 Stecker Dual Link

- doppelt abgeschirmt, sehr hochwertige Qualität
- für analoge und digitale Übertragung
- vergossene Stecker
- Ferritkerne an jedem Kabelende

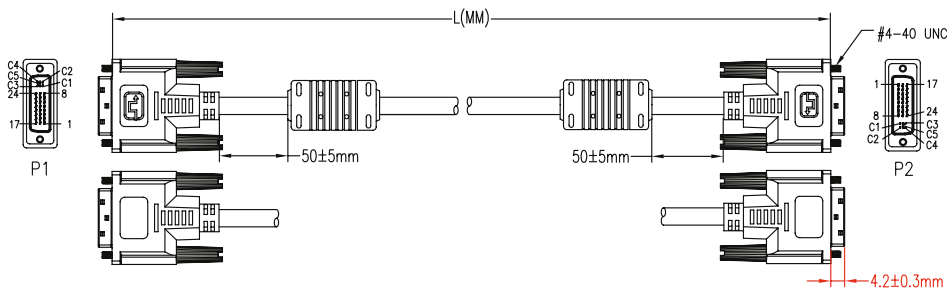


1. MATERIAL

- 1 DVI CABLE: {[7/0.12TCx1C+SP(30/0.10TC)+FAM]x3CO+[7/0.10BCx1P+D(7/0.10BC)+FAM]x7PCS +7/0.12BCx1P+7/0.12BCx5C}}+AM+D(7/0.12BC)+B(16/8/0.12ALM)+PVC BLACK JACKET
OD: $\varnothing 8.6 \pm 0.2$ mm
CABLE MARKING: E324703 AWM STYLE 20276 80°C 30V DVI CABLE
- 2 DVI (24+5) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS
NICKEL PLATED SHELL.
- 3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
- 4 FERRITE CORE (17.5*9.5*28.5mm) TO BE
- 5 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST
 - 2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX
 - 2.3 INSULATION RESISTANCE: 5 MEGOHMS MIN
3. PACKING: A PC/PE-BAG PACKAGING .
4. ALL MATERIALS ARE REACH COMPLIANT.

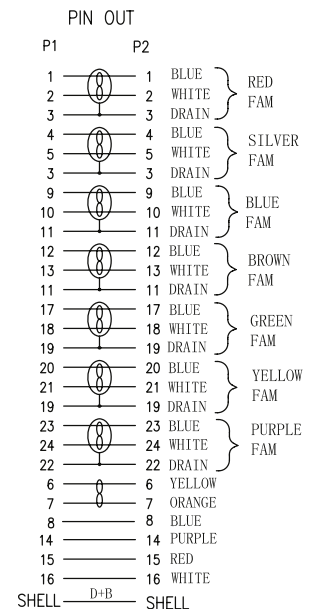

Art. Nr.	EAN	Länge
17791	4043718027491	1,8 m
17793	4043718027514	3 m