

INLINE® MINI SAS HD KABEL, SFF-8643 ZU 4X SATA + SIDEBAND




Dieses interne Mini SAS HD Kabel ist geeignet zum Verbinden von Geräten mit einer Mini SAS HD 4i (SFF-8643) Schnittstelle und SATA Schnittstelle, z. B. kann ein SAS Controller (SFF-8643 Host) mit einer Backplane (SATA Target) verbunden werden.

- Mini SAS HD Stecker (SFF-8643) zu 4x SATA Stecker + Sideband Stecker
- gerader SFF-8643 Stecker
- Kabel für internen Anschluss
- nicht bidirektional verwendbar




Art. Nr.	Länge	EAN
27630A	0,5 m	4043718211791
27630B	1 m	4043718211807

27630A

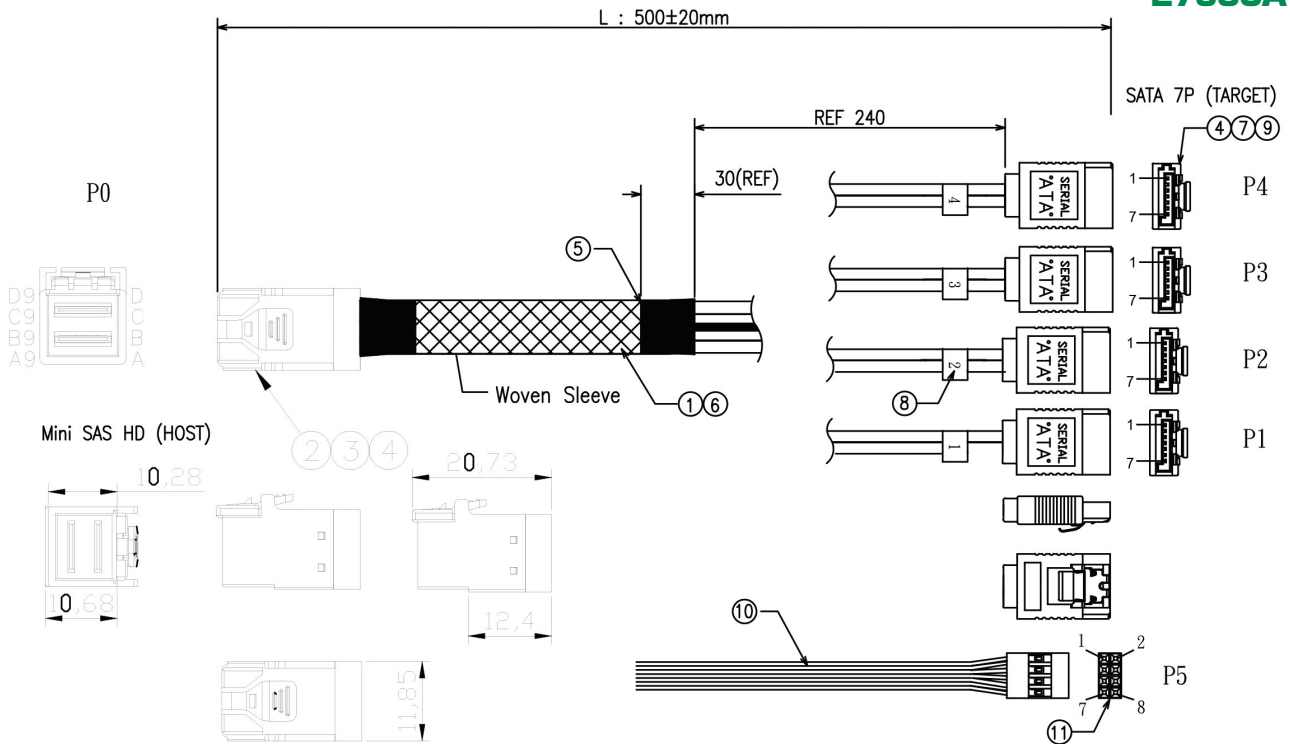

PIN ASSIGNMENT:


Mini SAS HD (HOST) SATA 7P (TARGET)

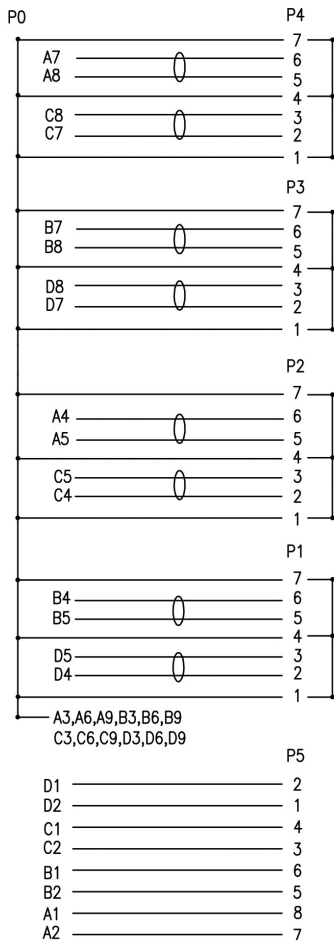


11	HSG&TER	PITCH: 2.54 2*4P BLACK
10	CABLE 2	FLAT CABLE 30AWG*8C
9	PVC	PVC 45% BLACK UL94V-0
8	LABEL	LABEL PRINT P1 & P2 & P3 & P4
7	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP
6	WOVEN SLEEVE	WOVEN SLEEVING TUBE BLACK
5	H.S.T	HEAT SHRINK TUBE BLACK ID:9.5mm
4	PE	PE LOW DENSITY
3	PBT	PBT BLACK
2	CONN 1	MINI SAS 4i PLUG CONTACT:G/F W/LATCH W/PCB
1	CABLE 1	(30AWG*2C+2D)*ALMYLAR+MYLAR W/C JACKET
NO.	PART NAME	SPEC DESCRIPTION

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- INSULATION RESISTANCE:5M Ohm(Min)
- CONDUCTIVE RESISTANCE:5 Ohm(Max).

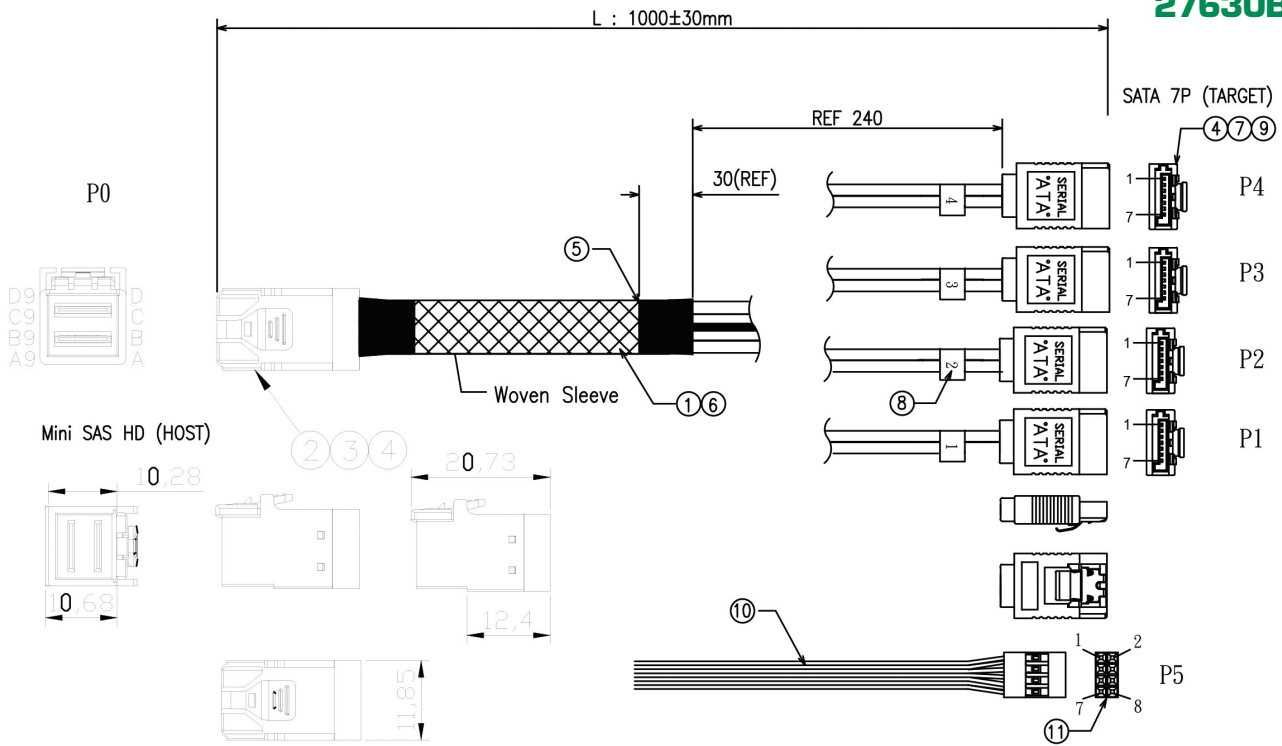

PIN ASSIGNMENT:

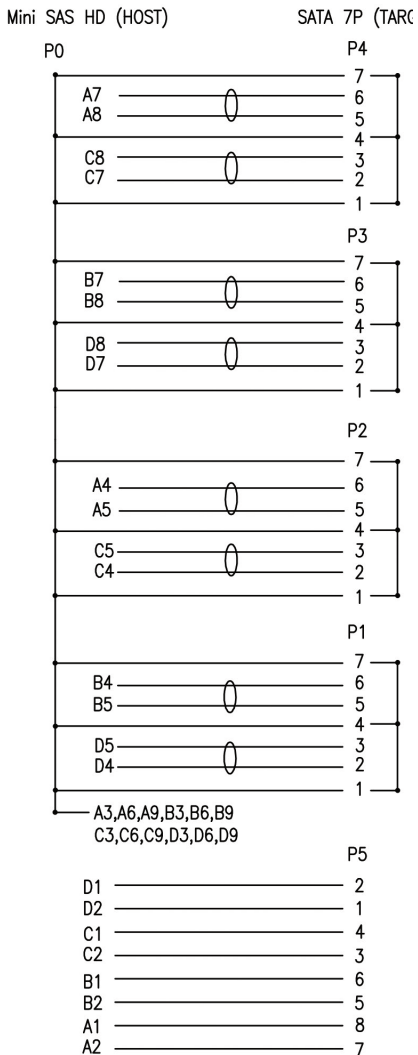

NO.	PART NAME	SPEC DESCRIPTION
11	HSG&TER	PITCH: 2.54 2*4P BLACK
10	CABLE 2	FLAT CABLE 30AWG*8C
9	PVC	PVC 45% BLACK UL94V-0
8	LABEL	LABEL PRINT P1 & P2 & P3 & P4
7	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP
6	WOVEN SLEEVE	WOVEN SLEEVING TUBE BLACK
5	H.S.T	HEAT SHRINK TUBE BLACK ID:9.5mm
4	PE	PE LOW DENSITY
3	PBT	PBT BLACK
2	CONN 1	MINI SAS 4i PLUG CONTACT:G/F W/LATCH W/PCB
1	CABLE 1	(30AWG*2C+2D)*ALMYLAR+MYLAR W/C JACKET
NO.	PART NAME	SPEC DESCRIPTION

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:5M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).