

INLINE® 19" STECKDOSENLEISTE, MIT SCHALTER, 2M, SCHWARZ, VARIABLE MONTAGEWINKEL



16416S



16411S




16412S



INLINE® 19" STECKDOSENLEISTE, MIT SCHALTER, 2M, SCHWARZ, VARIABLE MONTAGEWINKEL

Steckdosenleiste mit 6 Steckdosen zum Einbau in den 19" Netzwerkschrank

- 6-fach Steckdosenleiste mit Schalter
- Die 19"-Winkel lassen sich in 8 Positionen an die Leiste aufstecken, dadurch ist eine individuellere Montage im Schrank möglich
- Steckdosen nach DIN 49440, um 45° gedreht
- Maximale Gesamtbelastung 3680 W
- Zuleitung: H05VV-F3G1,5mm², Länge 2m, mit gewinkelter Schutzkontaktstecker CEE7/7
- Abmessungen Leiste: Breite 19" (482,6mm), Höhe: 1HE (45mm), Tiefe 45mm
- Aluminium-Leiste
- Farbe: schwarz RAL9004
- Ausgangsstrom: 16 A
- Berührungsschutz: Ja
- Eingang C14: Nein
- Eingangsspannung: 230 V
- GS-geprüft: Nein
- Kabel: 3G1,5 mm²
- Material: Kunststoff, Aluminium
- Stecker: Schutzkontakt gewinkelt
- Variante: Variable Montagewinkel
- Verpackungsart: Bulk-Karton ohne Eurolochung
- mit Überspannungsschutz: Nein

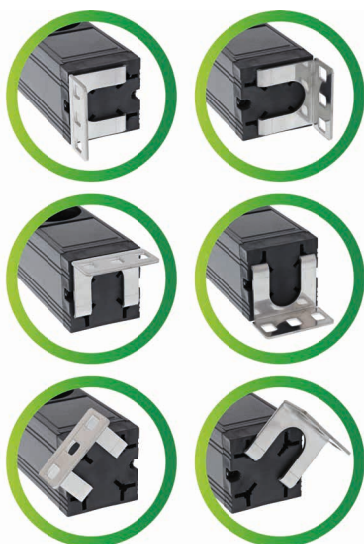


INDIVIDUELLE MONTAGE INDIVIDUAL MOUNTING



Art. Nr.	Schutzkontakt-Buchsen	EAN
16416S	6 Stück	4043718292271
16411S	7 Stück	4043718298143
16412S	8 Stück	4043718298150

16416S

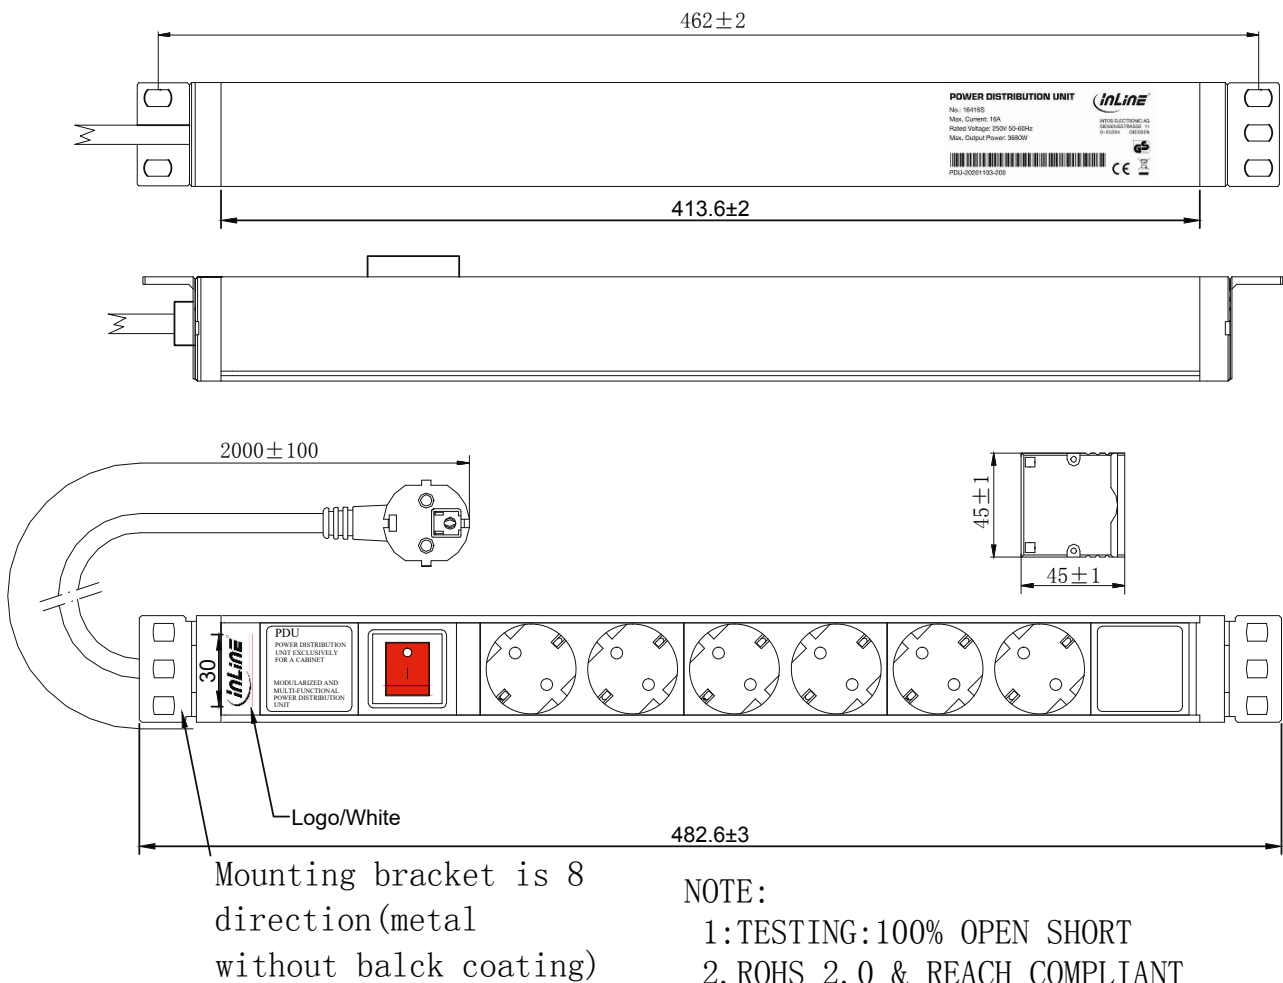

Sockets:

6×DIN 49440 45° degree Compliant VDE0620-1
16A/4000W, AC250V, IP20
CE certified

Cable:

2,0m H05VV-F 3G 1,5mm² with German
type earth contact plug CEE7
Cable: VDE certified
Plug: VDE certified

Profile:

1HE, Aluminum alloy black RAL9004

Plastic material:

Fireproof Polypropylene Color: black RAL9004

Holding flanges :

SPCC Thickness 2.0mm * 2

Switch:

2-poles, illuminated, red
VDE certified


Certificate for the Whole PDU:

Have GS certificate, Have CE certificate

Packing:

1pcs/PE bag + Inner carton

16411S

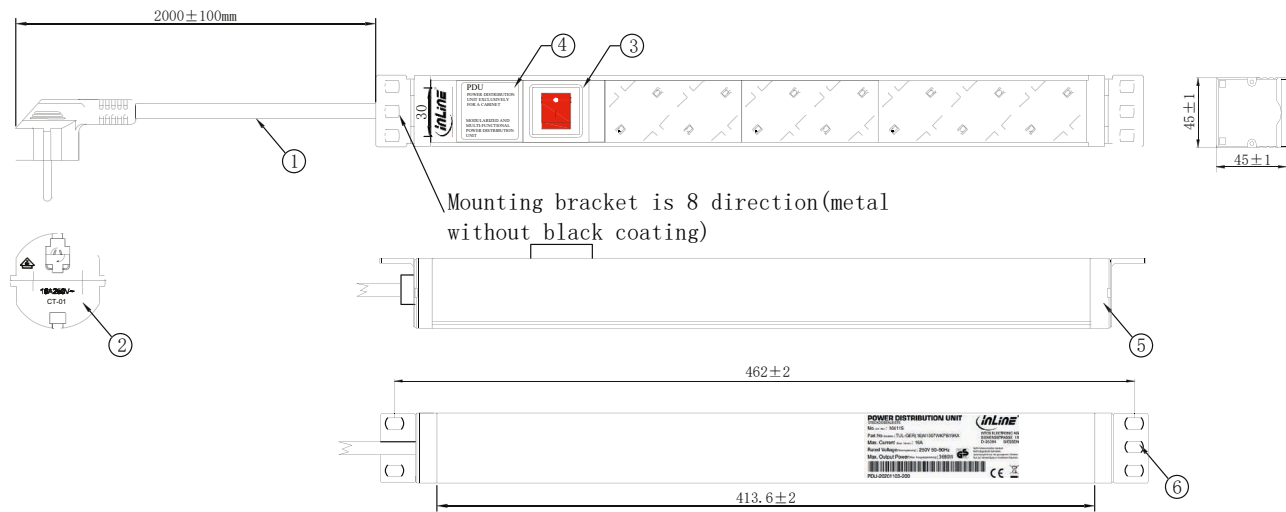


⑥	Holding	SPCC Thickness 2.0mm black RAL9004	2
⑤	Housing	1HE, Aluminum alloy black RAL9004	1
④	Switch	2-poles, illuminated, red VDE certified	1
③	Connector	DIN 49440 45° degree Compliant VDE0620-1 16A/Max. 3680W, AC250V, IP20 Fireproof Polypropylene Color:black RAL9004	7
②	Connector	CEE7/7 90° plug German type 16A 250V, PVC Moulding Black VDE certified	1
①	CABLE	H05VV-F 3G 1.5mm ² PVC JACKET OD:7.6±0.2MM VDE certified	1
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

NOTE:

- 1.100% OPEN, SHORT,Hipot Testing
- 2.RoHS 2.0&REACH Compliant
- 3.GS and CE certificate
- 4.Packing:Neutral box+label

16412S

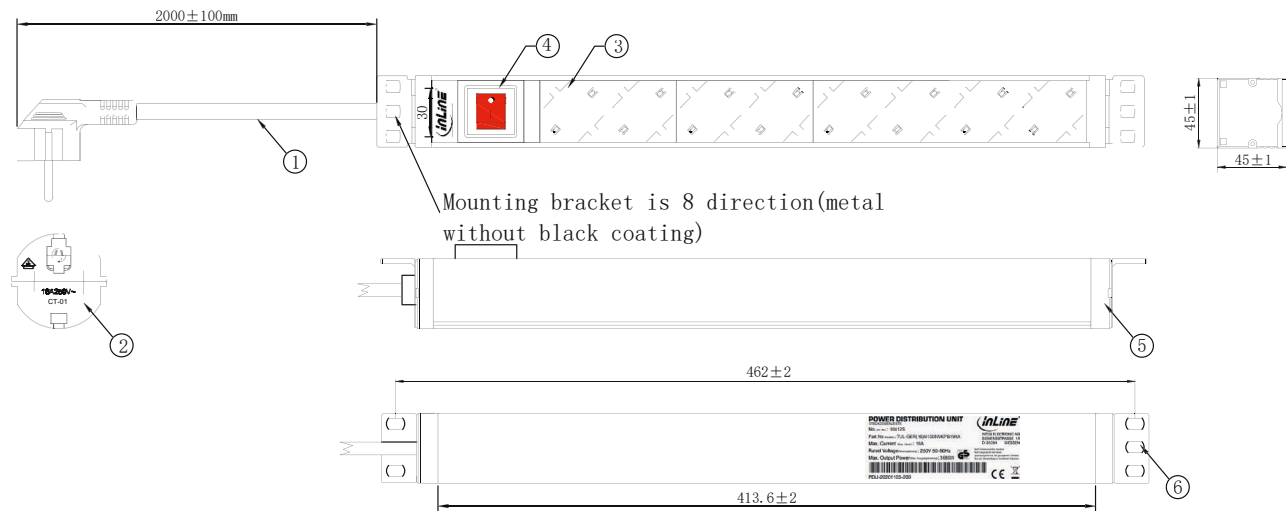

⑥	Holding	SPCC Thickness 2.0mm black RAL9004	2
⑤	Housing	1HE, Aluminum alloy black RAL9004	1
④	Switch	2-poles, illuminated, red VDE certified	1
③	Connector	DIN 49440 45° degree Compliant VDE0620-1 16A/Max. 3680W, AC250V, IP20 Fireproof Polypropylene Color:black RAL9004	8
②	Connector	CEE7/7 90° plug German type 16A 250V, PVC Moulding Black VDE certified	1
①	CABLE	H05VV-F 3G 1.5mm² PVC JACKET OD:7.6±0.2MM VDE certified	1
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

- NOTE:
- 1.100% OPEN, SHORT, Hipot Testing
 - 2. RoHS 2.0&REACH Compliant
 - 3. GS and CE certificate
 - 4. Packing: Neutral box+label