


## INLINE® DVI-D VERLÄNGERUNG, DUAL LINK 24+1 STECKER AUF 24+1 BUCHSE, 2 FERRITE



- DVI-D 24+1 Stecker an DVI-D 24+1 Buchse
- Dual-Link

- Farbe: schwarz
- Vernickelte Schirmung, Kontakte vergoldet

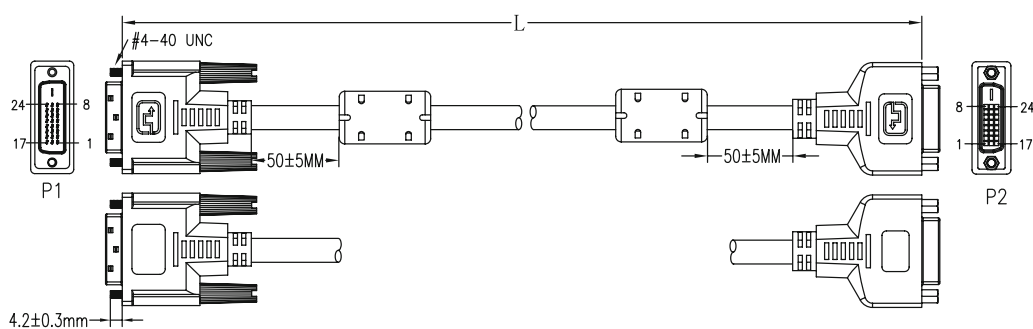

PIN OUT		
P1	P2	
1	1 BLUE	} RED FAM
2	2 WHITE	
3	3 DRAIN	} GREEN FAM
4	4 BLUE	
5	5 WHITE	} SILVER FAM
3	3 DRAIN	
9	9 BLUE	} YELLOW FAM
10	10 WHITE	
11	11 DRAIN	} BLUE FAM
12	12 BLUE	
13	13 WHITE	} PURPLE FAM
11	11 DRAIN	
17	17 BLUE	} BROWN FAM
18	18 WHITE	
19	19 DRAIN	
20	20 BLUE	
21	21 WHITE	
19	19 DRAIN	
23	23 BLUE	
24	24 WHITE	
22	22 DRAIN	
6	6 YELLOW	
7	7 ORANGE	
14	14 RED	
15	15 WHITE	
16	16 PURPLE	
SHELL	D-B	SHELL

### 1. MATERIAL

- 1.1 HDMI CABLE: (7/0. 10BC\*1P+7/0. 10BC+AM)\*7PCS+7/0. 12BC\*1P+7/0. 12BC\*3C+AM +7/0. 12BC+128/0. 12ALM+PVC BLACK JACKET  
OD:  $\varnothing 7.3 \pm 0.2 \text{ mm}$   
CABLE MARKING: InLine E324703 AWM STYLE 20276 80°C 30V DVI CABLE
- 1.2 DVI (24+1) MALE : BLACK INSULATION, GOLD PLATED CONTACTS  
NICKEL PLATED SHELL.  
DVI (24+1) FEMALE : BLACK INSULATION, GOLD PLATED CONTACTS  
NICKEL PLATED SHELL.
- 1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
- 1.4 FERRITE CORE (14. 3\*9. 0\*28. 5mm) TO BE
- 1.5 ALL HOOD: MOLDED BLACK PVC.

### 2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST
  - 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX
  - 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN
3. ALL MATERIALS ARE REACH COMPLIANT.

Art. Nr.	Länge	EAN
17773	2 m	4043718003143
17763	3 m	4043718034512
17776	5 m	4043718019564