

## INLINE® DISPLAYPORT 1.4 KABEL, 8K4K, NACH UNTEN GEWINKELT, SCHWARZ/GOLD



### DisplayPort 1.4 Kabel




- DisplayPort Stecker gerade zu DisplayPort Stecker nach unten gewinkelt
- Kabel 3-fach geschirmt
- Farbe: Schwarz
- Vergoldete Kontakte

### unterstützte Auflösungen:

- UHD-II/FUHD 7680x4320 (8K4K) @30Hz RGB/4:4:4 sowie @60Hz RGB/4:2:0 oder DSC
- UHD 3840x2160 @120Hz RGB/4:4:4 8bit HDR OFF
- UHD 3840x2160 @120Hz RGB/4:2:2 12bit HDR ON
- UHD 3840x2160 @60Hz RGB/4:4:4 12bit HDR ON
- FullHD 1920x1080
- HD 1280x720
- in PE Tüte mit EAN Code

| Technische Daten          |                                     |
|---------------------------|-------------------------------------|
| Hersteller                | InLine®                             |
| Kategorie                 | Kabel                               |
| Farbe                     | Schwarz                             |
| Seite A                   | DisplayPort Stecker                 |
| Seite B                   | DisplayPort Stecker unten gewinkelt |
| Schirmung                 | 3-fach geschirmt                    |
| Typ                       | DisplayPort 1.4                     |
| Signal                    | Video                               |
| Außendurchmesser          | 7,0 mm                              |
| Variante                  | Gewinkelt, vergoldete Kontakte      |
| UL                        | Nein                                |
| Vergoldete Kontakte       | Ja                                  |
| DisplayPort Spezifikation | DisplayPort 1.4                     |

| Art. Nr. | Länge | EAN           |
|----------|-------|---------------|
| 17151U   | 1 m   | 4043718292745 |
| 17152U   | 2 m   | 4043718292752 |
| 17153U   | 3 m   | 4043718305124 |
| 17155U   | 5 m   | 4043718305131 |

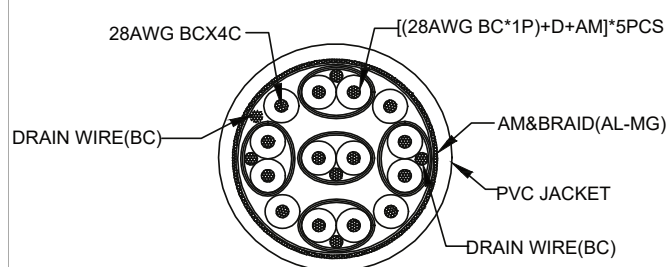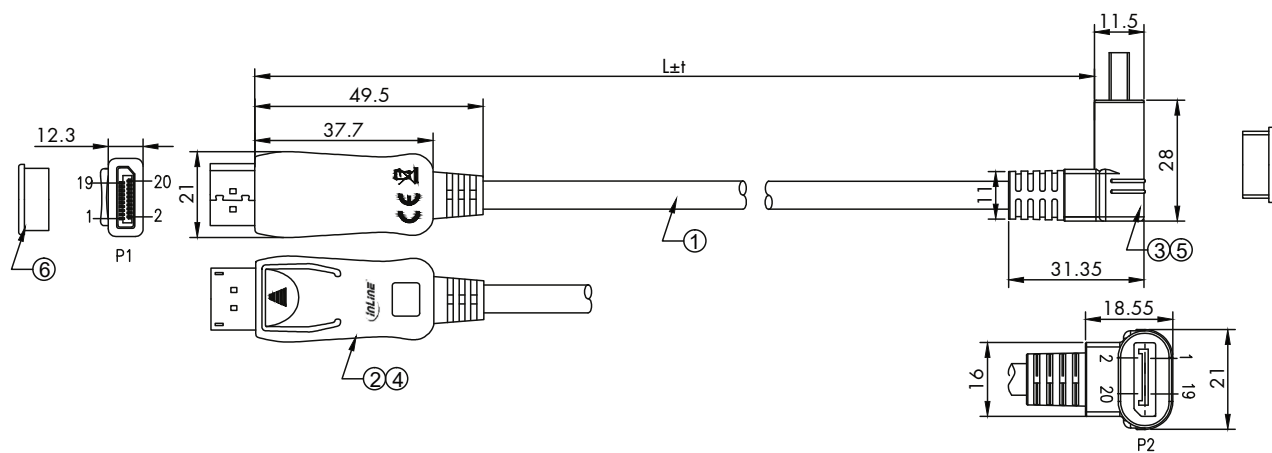

# PIN OUT

P1 P2

|    |    |
|----|----|
| 1  | 12 |
| 3  | 10 |
| 2  | 11 |
| 4  | 9  |
| 6  | 7  |
| 5  | 8  |
| 7  | 6  |
| 9  | 4  |
| 8  | 5  |
| 10 | 3  |
| 12 | 1  |
| 11 | 2  |
| 13 | 13 |
| 14 | 14 |
| 15 | 15 |
| 17 | 17 |
| 19 | 19 |
| 18 | 18 |
| 16 | 16 |

SHELL SHELL  
BRAID

|     |               |                                                                                            |          |
|-----|---------------|--------------------------------------------------------------------------------------------|----------|
| ⑥   | DUST COVER    | PE/TRANSPARENT                                                                             | 2        |
| ⑤   | OUTER MOLD    | BLACK PVC                                                                                  | 1        |
| ④   | OUTER MOLD    | BLACK ABS                                                                                  | 1        |
| ③   | DP MALE ANGLE | DP1.4 MALE, WITHOUT LOCK, RED INSULATION, GOLD PLATED PIN, GOLD PLATED SHELL               | 1        |
| ②   | DP MALE       | DP1.4 MALE, WITH LOCK, RED INSULATION, GOLD PLATED PIN, GOLD PLATED SHELL                  | 1        |
| ①   | CABLE         | (28AWG/1 BC*1P+D+AM)*5+28AWG/1 BC*4C+AL-FOIL+D+AL-MG BRAID<br>+JACKET:PVC /BLACK 7.0±0.2MM | 1        |
| NO. | PART NAME     | DESCRIPTION                                                                                | QUANTITY |

## NOTE:

### 1.Electronic test

1.1 Open/short 100% test

1.2 Tested by quantum data 980 handheld test instrument for DP1.4(32.4G)

### 2.Tested by PC, 3840\*2160 120Hz 4:4:4 8bit HDR OFF

Tested by PC, 3840\*2160 120Hz 4:2:2 12bit HDR ON

Tested by PC, 3840\*2160 60Hz 4:4:4 12bit HDR ON

Tested by PC, 720P,1080P

### 3.PRINTING:High Speed Cable 20276 80℃ 30V VW-1

ROHS 3 support (EU 2015/863) Compliant