


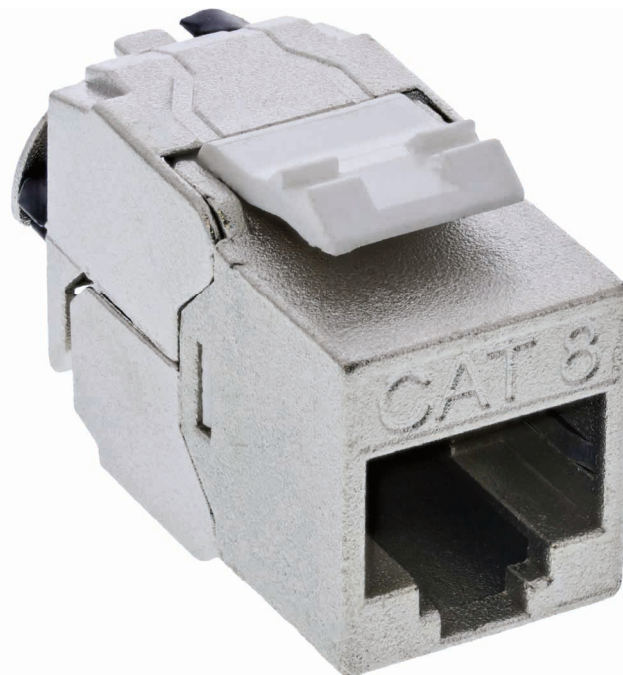

## INLINE® KEYSTONE RJ45 BUCHSE SLIM, SNAP-IN, CAT.8.1, INTEGRIERTER KABELBINDER






- RJ45 Buchse, Keystone SNAP-In Modul, Cat.8.1 2000MHz
- bis 10Gbit/s geeignet
- für 19" Leerblech und Anschlussdosen
- mit LSA-Leiste
- Vollgeschirmt
- Druckguss Gehäuse
- Für starre Installationskabel AWG 22-26 und Außendurchmesser 6,0-8,5mm geeignet
- Breite 14,5mm, Länge 31,8mm, Höhe 19,4mm (Ausschnitt Höhe: 16mm)
- Unterstützt PoE, PoE+
- Ausgelegt für 750 Steckzyklen
- Ein integrierter Kabelclip auf der Kabelseite erleichtert die Installation

### NOTE:

- Electronic test
  - 1.1 Open/short 100% test
  - 1.2 Contact Resistance: 200mΩ Max
  - 1.3 Insulation Resistance: 500mΩ Min@500V DC
  - 1.4 Withstand voltage: DC 1000V AC 700V 60Hz, 1min.
- Fluke Channel test
  - Test limit: ISO11801 Channel Class I
- Durability: RJ45 750 cycles min.
- Applicable product:
  - Solid cable: AWG24/1~22/1, wire diameter from 0.9~1.6mm
  - Stranded cable: 24AWG/7~22AWG/7, wire diameter from 0.9~1.6mm
  - Cable OD: 6.0~8.5mm
- Storage temperature: -40℃~70℃  
Operation temperature: -10℃~60℃
- Packing: 1pc/20106A+label 1, 50pcs/white box+label 2

RoHS2.0 (2011/65/EU) / (2015/863/EU) Compliant

|     |              |                                                                                    |
|-----|--------------|------------------------------------------------------------------------------------|
| ⑤   | IDC housing  | PC, colour: white, with the sticker color codes combine two wirings of 568A & 568B |
| ④   | IDC terminal | Phosphor bronze with tin plated, suitable for 22~24AWG cable                       |
| ③   | Jacks        | Shielded RJ45 8P8C, gold plated pin                                                |
| ②   | PCB          | FR4 ul94 V-0                                                                       |
| ①   | Housing      | Zinc Alloy/Silver                                                                  |
| NO. | PART NAME    | DESCRIPTION                                                                        |

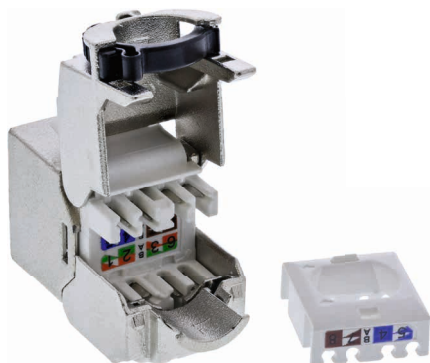

**EAN: 4043718312153**  
**ART.-NR.: 76202Q**