
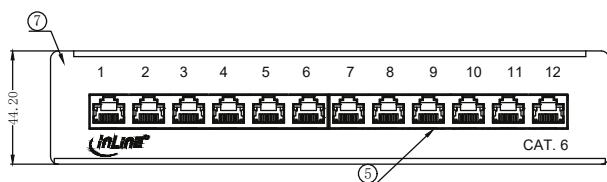
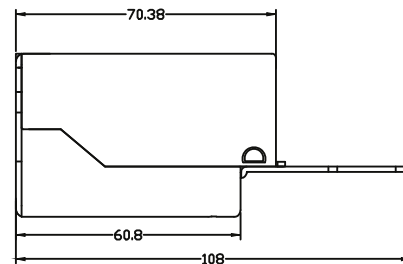
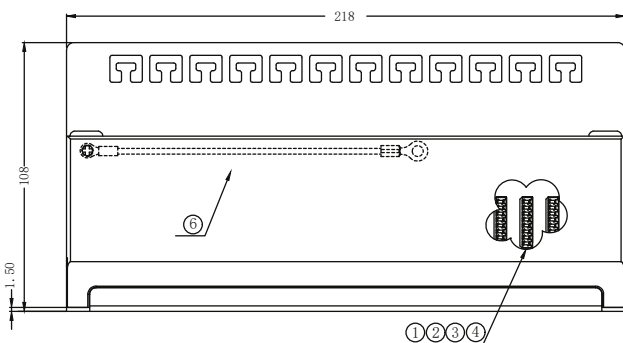
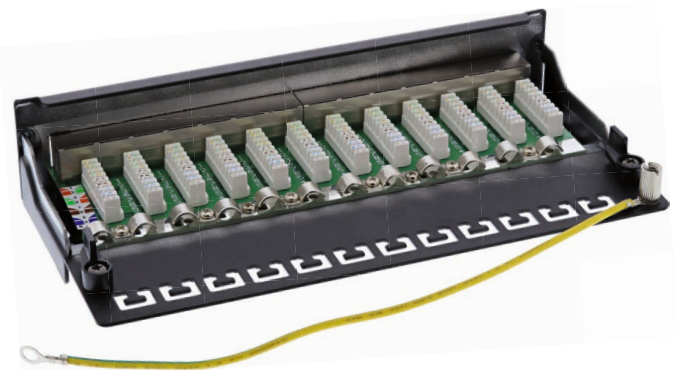


INLINE® PATCHFELD CAT.6 12-FACH, TISCH-/WANDMONTAGE

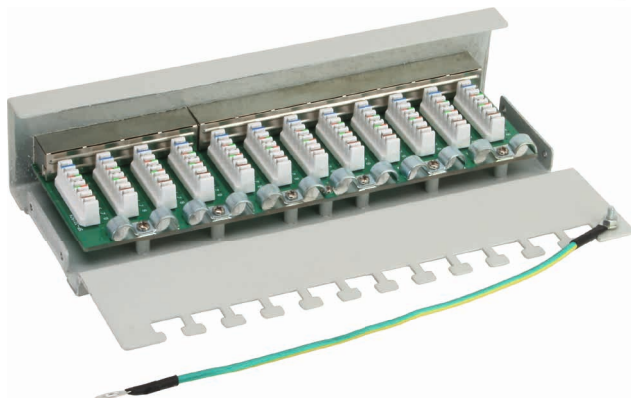

①	Bottom Panel :	1.5mm thickness Metall Panel with plastic powder cladding Frosting surface treatment	1
②	Upper Panel Cover :	1.2mm thickness Metall Panel with plastic powder cladding Frosting surface treatment	1
③	RJ45 Jack :	Housing PBT Pin-8P8C 3u" gold plated	12
④	PCB :	1.6mm	1
⑤	IDC BODY :	PC/ABS	12
⑥	IDC PIN :	Phosphor Bronze & Tinned	96
⑦	IDC TERMINAL :	For 22-26 AWG Cable	12
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

In diesem Desktop Patchfeld können bis zu 12 Verlegekabel über LSA Schneidklemmen angeschlossen werden. Das Patchfeld ist bis Cat. 6 ausgelegt und ist voll abgeschirmt. Die RJ45 Anschlüsse sind durchnummeriert.

- Zur Tisch- und Wandmontage geeignet
- Mit 12 Anschlüssen, Anschluss über LSA Schneidklemmen
- Ausgelegt bis Cat. 6, voll abgeschirmt

ELECTRICAL :

1. VOLTAGE RATING : 125V AC RMS
2. CURRENT RATING : 1.5A mp
3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
6. CAT. 6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B. 2-1

ENVIRONMENTAL :

1. STORAGE : -40° TO+85°
 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

1. RJ45 JACK LIFE: 750 TIMES MIN
2. IDN LIFE : 200 TIMES MIN

Art. Nr.	Farbe	EAN
76209S	● (RAL9005)	4043718193103
76209	● (RAL7035)	4043718193110