

INLINE® DISPLAYPORT 1.4 KABEL, 8K4K, NACH OBEN GEWINKELT, SCHWARZ/GOLD



DisplayPort 1.4 Kabel


- DisplayPort Stecker gerade zu DisplayPort Stecker nach oben gewinkelt
- Kabel 3-fach geschirmt
- Farbe: Schwarz
- Vergoldete Kontakte
- in PE Tüte mit EAN Code

Unterstützte Auflösungen:


- UHD-II/FUHD 7680x4320 (8K4K) @30Hz RGB/4:4:4 sowie @60Hz RGB/4:2:0 oder DSC
- UHD 3840x2160 @120Hz RGB/4:4:4 8bit HDR OFF
- UHD 3840x2160 @120Hz RGB/4:2:2 12bit HDR ON
- UHD 3840x2160 @60Hz RGB/4:4:4 12bit HDR ON
- FullHD 1920x1080
- HD 1280x720

Technische Daten	
Hersteller	InLine®
Kategorie	Kabel
Farbe	Schwarz
Seite A	DisplayPort Stecker
Seite B	DisplayPort Stecker oben gewinkelt
Schirmung	3-fach geschirmt
Typ	DisplayPort 1.4
Signal	Video
Außendurchmesser	7,0 mm
UL	Nein
Vergoldete Kontakte	Ja
DisplayPort Spezifikation	DisplayPort 1.4


Art. Nr.	Länge	EAN
171510	1 m	4043718292721
171520	2 m	4043718292738
171530	3 m	4043718305148
171550	5 m	4043718305155

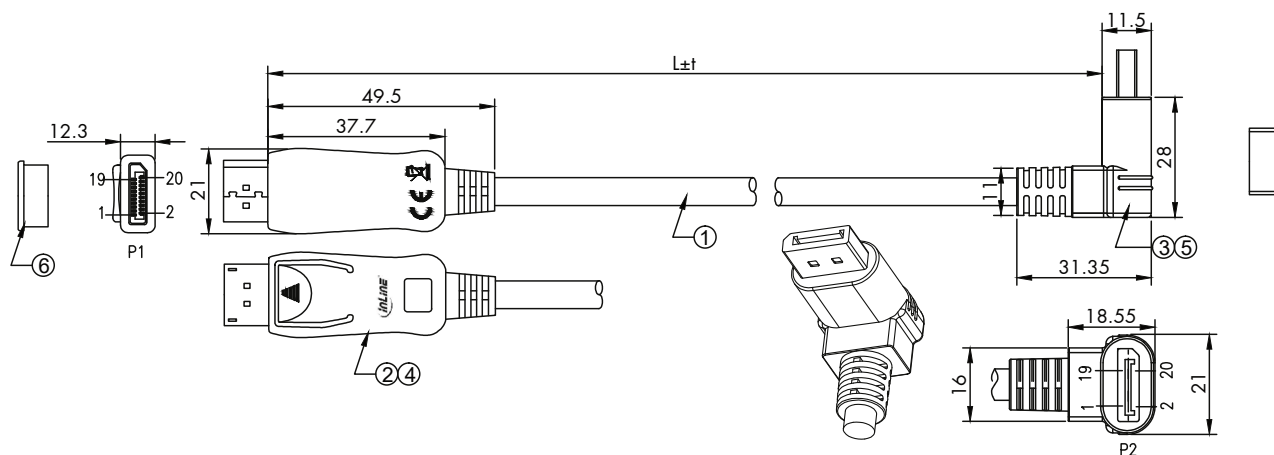

⑥	DUST COVER	PE/TRANSPARENT	2
⑤	OUTER MOLD	BLACK PVC	1
④	OUTER MOLD	BLACK ABS	1
③	DP MALE ANGLE	DP1.4 MALE, WITHOUT LOCK, RED INSULATION, GOLD PLATED PIN, GOLD PLATED SHELL	1
②	DP MALE	DP1.4 MALE, WITH LOCK, RED INSULATION, GOLD PLATED PIN, GOLD PLATED SHELL	1
①	CABLE	(28AWG/1 BC*1P+D+AM)*5+28AWG/1 BC*4C+AL-FOIL+D+AL-MG BRAID +JACKET:PVC /BLACK 7.0±0.2MM	1
NO.	PART NAME	DESCRIPTION	QUANTITY

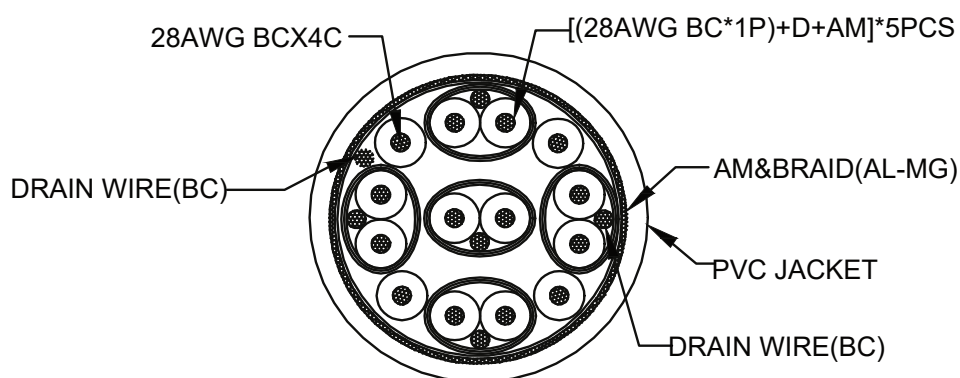

PIN OUT

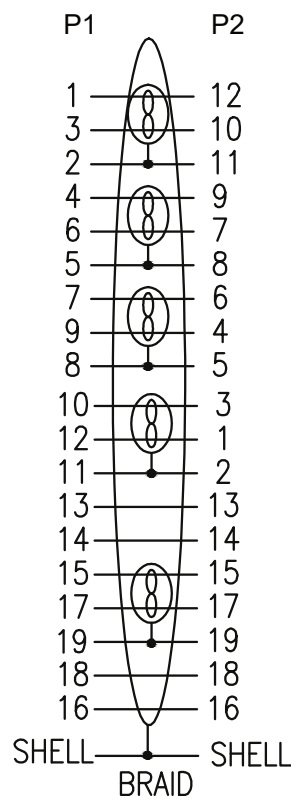

NOTE:

1. Electronic test

1.1 Open/short 100% test

1.2 Tested by quantum data 980 handheld test instrument for DP1.4(32.4G)

2. Tested by PC, 3840*2160 120Hz 4:4:4 8bit HDR OFF

Tested by PC, 3840*2160 120Hz 4:2:2 12bit HDR ON

Tested by PC, 3840*2160 60Hz 4:4:4 12bit HDR ON

Tested by PC, 720P, 1080P

3. PRINTING: High Speed Cable 20276 80°C 30V VW-1

ROHS 3 support (EU 2015/863) Compliant