


INLINE® JOYSTICKVERLÄNGERUNG, 15POL STECKER / BUCHSE, VERGOSSEN



- 15pol Sub D Stecker an 15 pol Sub D Buchse
- 1:1 Belegung, Hauben vergossen

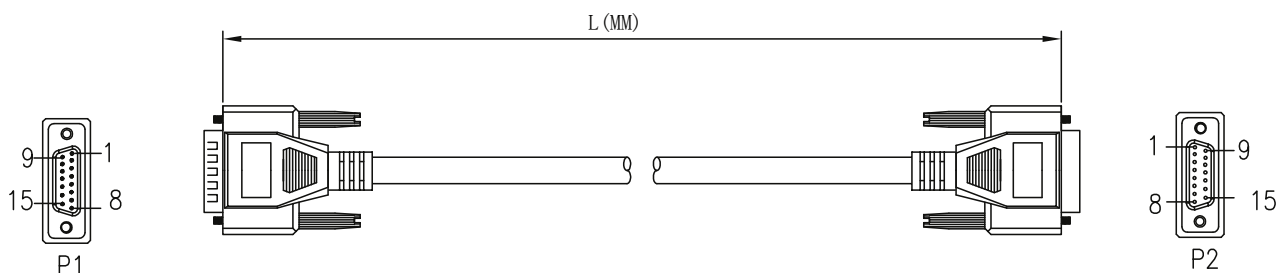

NOTES:

1. MATERIALS

- 1.1 CABLE: 7/0.12TCX15C+7/0.12TC+AM, GREY(7534C) PVC JACKET.
OD=∅5.8 ± 0.15mm.
CABLE MARKING: **inLine**® COMPUTER INTERFACE CABLE 30V 80°C
- 1.2 P1: DB 15PIN MALE: SOLDER TYPE,
GOLD FLASH CONTACTS, NICKEL PLATED SHELL;
- 1.3 P2: DB 15PIN FEMALE: SOLDER TYPE,
GOLD FLASH CONTACTS, NICKEL PLATED SHELL;
- 1.4 HOOD MOLDED GREY(7534C) PVC.
- 1.5 THUMB SCREW TO BE MOLDED GREY(7534C) PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST.
- 2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX.
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
- 2.4 HI-POT: DC300V/0.01S.

3. ALL MATERIAL BE RoHS COMPLIANT.

P1	PIN	OUT	P2
1	1	BROWN	1
2	2	RED	2
3	3	ORANGE	3
4	4	YELLOW	4
5	5	GREEN	5
6	6	BLUE	6
7	7	VIOLET	7
8	8	GREY	8
9	9	WHITE	9
10	10	BLACK	10
11	11	DARK GREEN	11
12	12	PINK	12
13	13	LIGHT BLUE	13
14	14	LIGHT GREEN	14
15	15	DEEP BLUE	15

SHELL DRAIN WIRE SHELL

Art. Nr.	EAN	Länge
17740	4043718001309	2 m
17746	4043718001323	5 m
17749	4043718001293	10 m